

Element 455

15.1" and 18.5" POS Terminal















The **Element 455** redefines efficiency with its compact and modern design, making it perfect for retail and hospitality environments. Powered by an Intel® processor, it delivers seamless performance on a fanless system, ensuring reliability and quiet operation.

Designed for versatility, the 455 features a sleek 15.1" or 18.5" touchscreen display, multiple connectivity options, and flexible peripheral support, allowing businesses to customise their setup with scanners, printers, and customer-facing displays.

With a durable yet stylish build, this all-in-one POS terminal is an excellent solution for businesses seeking a space-saving, highperformance system that enhances both customer interactions and operational workflows.

- Equipped with Intel® Alder Lake N N97 / i3-N305 processors
- Supports Windows 10 and 11 IoT Enterprise, Linux, Android 13.0
- Features a 15.1" or 18.5" 1024 x 768 display with PCAP touch technology
- High Flexibility with Foldable Stand
- Intelligent cable management integrated into the stand
- VESA mounting compatibility for both the back cover and foldable stand
- Front splash-proof protection & a versatile selection of peripherals

DISPLAY




Crafted with **PCAP** touch technology for intuitive navigation and increased durability.

MODULARITY




The new 455 CPU Module features a modular design that enables **tool-free removal** for streamlined servicing and component access.


I/O PORTS

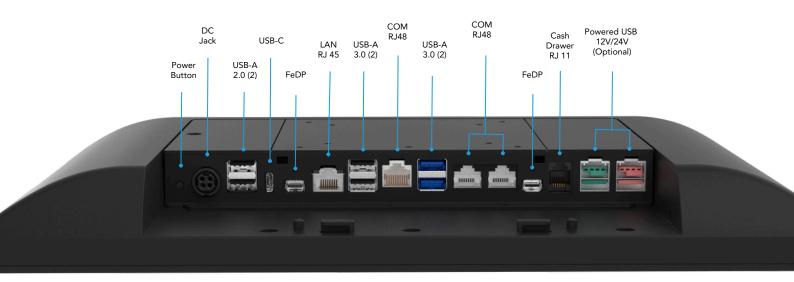


WIDE SELECTION OF PERIPHERALS

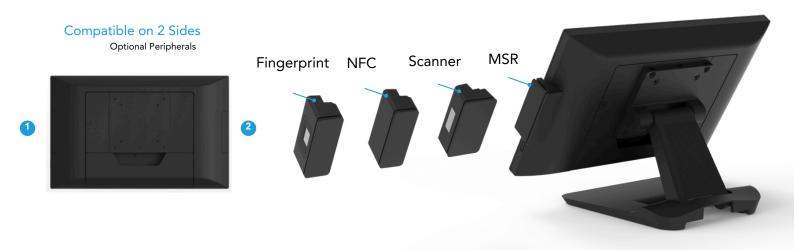

PRODUCT DIMENSION

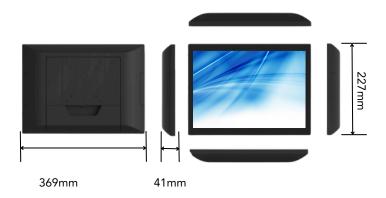

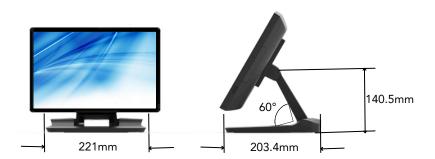

SINGLE CABLE SOLUTION

Dedicated 11.6 CDU display screen – connect via a single cable and bracket.



Connect an Element customer display touch monitor (11.6" or 15.6") via FEDP or USB-C for a clean, single-cable solution."

VESA COMPATIBLE

Compatible with 75/100 VESA mount.

EASY SERVICE

Rear service door for storage expansion card.





Technical Specifications - 455 POS System

| Item | | Parameter |
|--------------------------|------------------------|--|
| System | Motherboard | G35 |
| | Processor | Intel® Alder Lake N Processor: N97, i3-N305 |
| | Memory | 1x DDR4 8GB |
| | Storage | 128GB SSD (M.2) |
| Display | Size and Resolution | 15.1" 1024 x 768 |
| | Touch Screen | True-Flat PCAP multi-touch |
| I/O ports | USB Type-A | 2 x USB3.0, 4 x USB2.0 |
| | USB Type-C | 1 x USB3.0 full-functioned (DP/PD 5V/3A, 12V/3A) |
| | Serial Port | 3 x RJ48 (standard RS232) (default 0V; 5V,12V) |
| | LAN | 1 x RJ45 |
| | Cash Drawer | 1 x RJ11 |
| | FeDP | 2 x proprietary miniDP (1 x for main display, 1 x for 2nd display) |
| | DC Jack | 1 x 4PIN (with latch) |
| Optional I/O | Powered USB (Optional) | 1x Powered USB 12V, 1x Powered USB 24V |
| Audio | Internal Speaker | 1 x 3W |
| Indicator | Power Button | 1 |
| Power | Power Adapter | 65W/19V (120W/19V with 1x PUSB 12V & 1x PUSB 24V) |
| Communication | WLAN + BT (Optional) | 802.11 series + BT5.0 (Optional) |
| Peripheral (optional) | MSR | 3-Track MSR (USB) |
| | Fingerprint | Fingerprint Reader (USB) |
| | iButton | iButton (USB) |
| | Customer Display | LCM display 2 x 20 characters (USB) |
| | 2nd Display | 11.6" 2nd Display |
| Certificate | EMC & Safety | FCC Class A, CE Mark Class A, LVD |
| Environment | Operating Temperature | 0°C ~ 35°C (32°F ~ 95°F) |
| | Storage Temperature | -20°C ~ 60°C (-4°F ~ 140°F) |
| | Humidity | 20% ~ 85% RH non-condensing |
| Dimensions | WxHxD | 369 x 277 x 203 mm (14.2" x 10.9" x 8.0") |
| Weight | | 4.3 kg |
| Mounting | VESA Mount | 75 x 75, 100 x 100 |
| OS Supported | | Windows 10 and 11 IoT Enterprise, Linux, Android 13.0 |

^{*}Product specifications and data are subject to change without notice (E&OE)

